

TWO-PLY FABRIC BEARING RUBBER HOSE  
1/2" MINIMUM I.D. (3 REQ.)

DOUBLE STRAND TWISTED MALLEABLE #10  
GAUGE ANNEALED STEEL WIRE (3 REQ.)

SET 3 STAKES OR GUYS 1/2 TO 2/3 UP TREE

REMOVE BURLAP FROM TOP 1/3 OF BALL

4" OF SHREDDED MULCH COVERING ENTIRE  
PLANT BED

CONSTRUCT 5" HIGH SAUCER AROUND PERIMETER


FINISHED GRADE

BACKFILL MIXTURE: 2 PARTS NATIVE SOIL,  
1 PART TOPSOIL, 1 PART PEAT MOSS

STAKES TO EXTEND 18" BELOW TREE PIT  
INTO UNDISTURBED GROUND

EXISTING SOIL TO BE LOOSENEED TO 6" DEPTH  
WHERE SOILS ARE OF HIGH CLAY CONTENT

COMPACTED BACKFILL MIX OR UNDISTURBED SUBSOIL

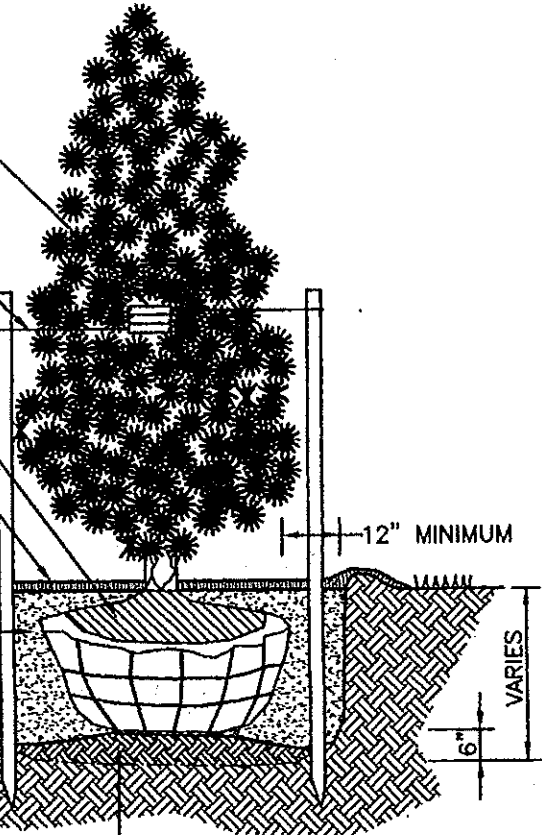

**NOTES:**

1. STAKE ALL EVERGREEN TREES UNDER 8 FT. GUY TREES 8 FT. AND OVER AS SPECIFIED FOR DECIDUOUS TREE.
2. TREE SHALL BEAR SAME RELATION TO FINISHED GRADE AS IT BORE TO PREVIOUS GRADE IN THE NURSERY.
3. PRUNE ONLY TO REMOVE DAMAGED OR BROKEN BRANCHES. LEADER OF TREE SHALL NEVER BE CUT.

**EVERGREEN TREE PLANTING DETAIL**

N.T.S.